



1. RS-232 cable should be a 24AWG standard cable and not be trimming docking.
2. If the projector can not be controlled, please switch TXD and RXD connections.

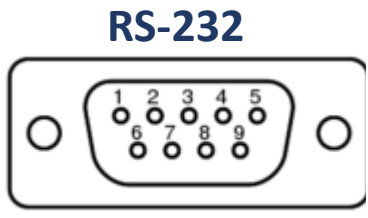

Pin	Signal	Pin	Signal	Pin	signal
1	(No Connection)	4	(No Connection)	7	RTS
2	RD	5	Ground	8	CTS
3	TD	6	(No Connection)	9	(No Connection)

Pin Assignment



Pin NO.	Signal	Pin NO.	signal
1	RXD	5	RTS
2	CTS	6	NC
3	OSR	7	TXD
4	GND	8	NC